SPIGOLO PENDANT HORIZONTAL

Studiocharlie

Floor, wall/ceiling, pendant and table lamps based on an extruded and tubular aluminium structure, connected with moulded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. The floor version is designed as such to provide a virtual divider to ambiences, while the ceiling and wall versions allow the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable.

LED 2700K

LAMPING

Source	2xlinear LED
Total power	2x19W
Emission	double, diffused
Switching	mono switch, dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2x1125lm
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	decentralized ceiling canopy, metal cable length 3m, electric cable length 5m, orientable diffusers 360°, DALI version on request
Net lamp weight	2,8 kg

Codes	*Structure*
SPI LW2 52	white
SPI LN2 52	black

PACKAGE

Package 01	Dimension: 18x22x66 cm / Gross weight: 3 kg
Package 02	Dimension: 17x18x118 cm / Gross weight: 1,8 kg

Certificazioni

CE EAC

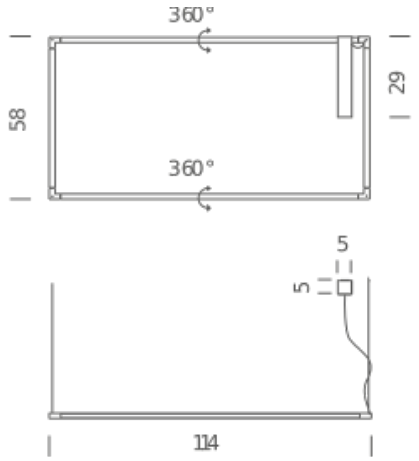

LED 3000K

LAMPING

Source	2xlinear LED
Total power	2x19W
Emission	double, diffused
Switching	mono switch, dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2x1125lm
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	decentralized ceiling canopy, metal cable length 3m, electric cable length 5m, orientable diffusers 360°, DALI version on request
Net lamp weight	2,8 kg

Codes	*Structure*
SPI LWW 52	white
SPI LNN 52	black

PACKAGE

Package 01	Dimension: 18x22x66 cm / Gross weight: 3 kg
Package 02	Dimension: 17x18x118 cm / Gross weight: 1,8 kg

Certificazioni

CE EAC

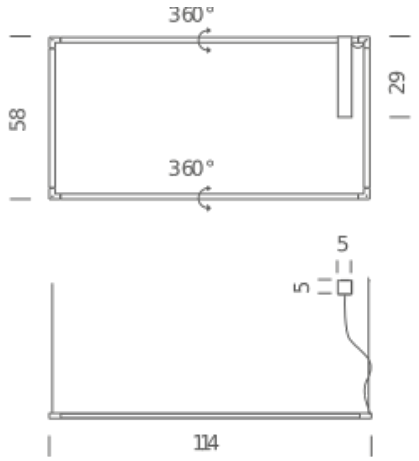

SPIGOLO PENDANT VERTICAL

Studiocharlie

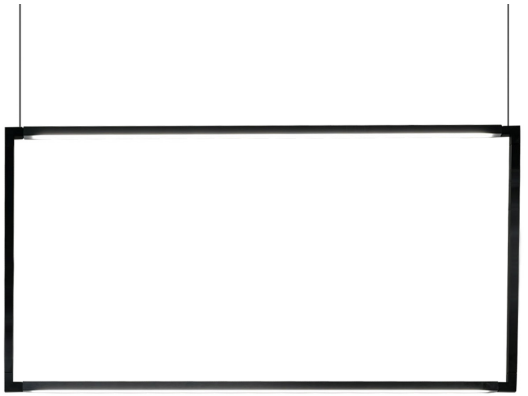

Floor, wall/ceiling, pendant and table lamps based on an extruded and tubular aluminium structure, connected with moulded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. The floor version is designed as such to provide a virtual divider to ambiences, while the ceiling and wall versions allow the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable.

LED 2700K

LAMPING

Source	2xlinear LED
Total power	2x19W
Emission	double, diffused
Switching	mono switch, dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2x1125lm
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	cable length 3m, orientable diffusers 360°, DALI version on request
Net lamp weight	2,8 kg

Codes	*Structure*
SPI LW2 51	white
SPI LN2 51	black

PACKAGE

Package 01	Dimension: 18x22x66 cm / Gross weight: 3 kg
Package 02	Dimension: 17x18x118 cm / Gross weight: 1,8 kg

Certificazioni

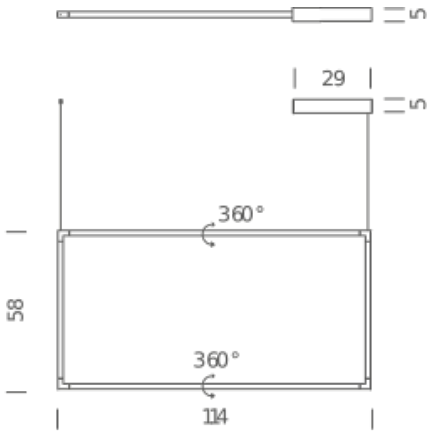

LED 3000K

LAMPING

Source	2xlinear LED
Total power	2x19W
Emission	double, diffused
Switching	mono switch, dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2x1125lm
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	cable length 3m, orientable diffusers 360°, DALI version on request
Net lamp weight	2,8 kg

Codes	*Structure*
SPI LWW 51	white
SPI LNN 51	black

PACKAGE

Package 01	Dimension: 18x22x66 cm / Gross weight: 3 kg
Package 02	Dimension: 17x18x118 cm / Gross weight: 1,8 kg

Certificazioni
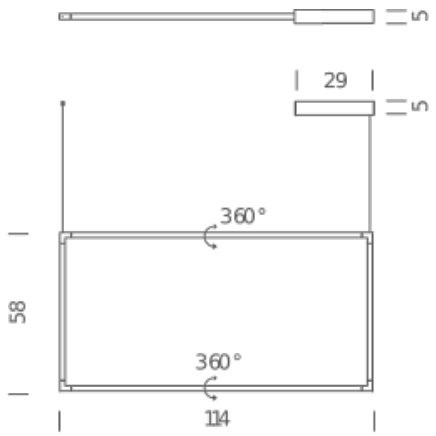
CE EAC