


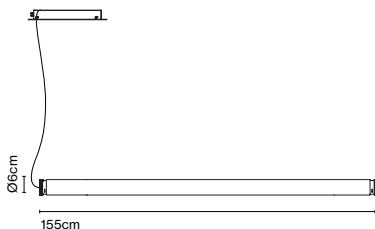

Fris Joan Gaspar

marset

**Fris Pro 155****Fris Pro 155**

Light source:
LED SMD 1050mA 38W 3000K CRI90 5495lm
UGR <19, LED opening degrees: 55°

DALI
Casambi

Cable length: 3 m
Wire installation: Hardwired
Color cord: Black
Canopy color: Black
LED included

Aluminium structure. Glass diffuser tube to direct the light in different directions.

● Black
● Bronze

dimable




Product notes:
Tunable white (27K - 40K) available upon request.
4000K available upon request.
LED opening degrees:
30° y 65° available upon request.
Fris Pro 215 available upon request. Minimum 5 units.
Power supply and canopy included.
Hooks to be ordered separately.

[Download](#) Assembly instructions
[Download](#) Photometric data
[Download](#) 2D
[Download](#) 3D

Through the transparent glass we see the lamp's interior, which consists of two profiles: one includes the light source and the other acts as a parabola, projecting a crisp, intense light.



Fris Pro A 155



Fris Pro A 155

Light source:
LED SMD 1050mA 38W 3000K CRI90 5495lm
UGR <19, LED opening degrees: 55°

DALI
Casambi

Cable lenght: 3 m
Wire installation: Hardwired
Color cord: Black
Canopy color: Black
LED included

Aluminium structure. Glass diffuser tube to direct the light in different directions.

- Black
- Bronze


dimmable




Product notes:
Tunable white (27K - 40K) available upon request.
4000K available upon request.
LED opening degrees:
30° y 65° available upon request.
Canopy and power supply included.

- [Download](#) Assembly instructions
- [Download](#) Photometric data
- [Download](#) 2D
- [Download](#) 3D

Through the transparent glass we see the lamp's interior, which consists of two profiles: one includes the light source and the other acts as a parabola, projecting a crisp, intense light.

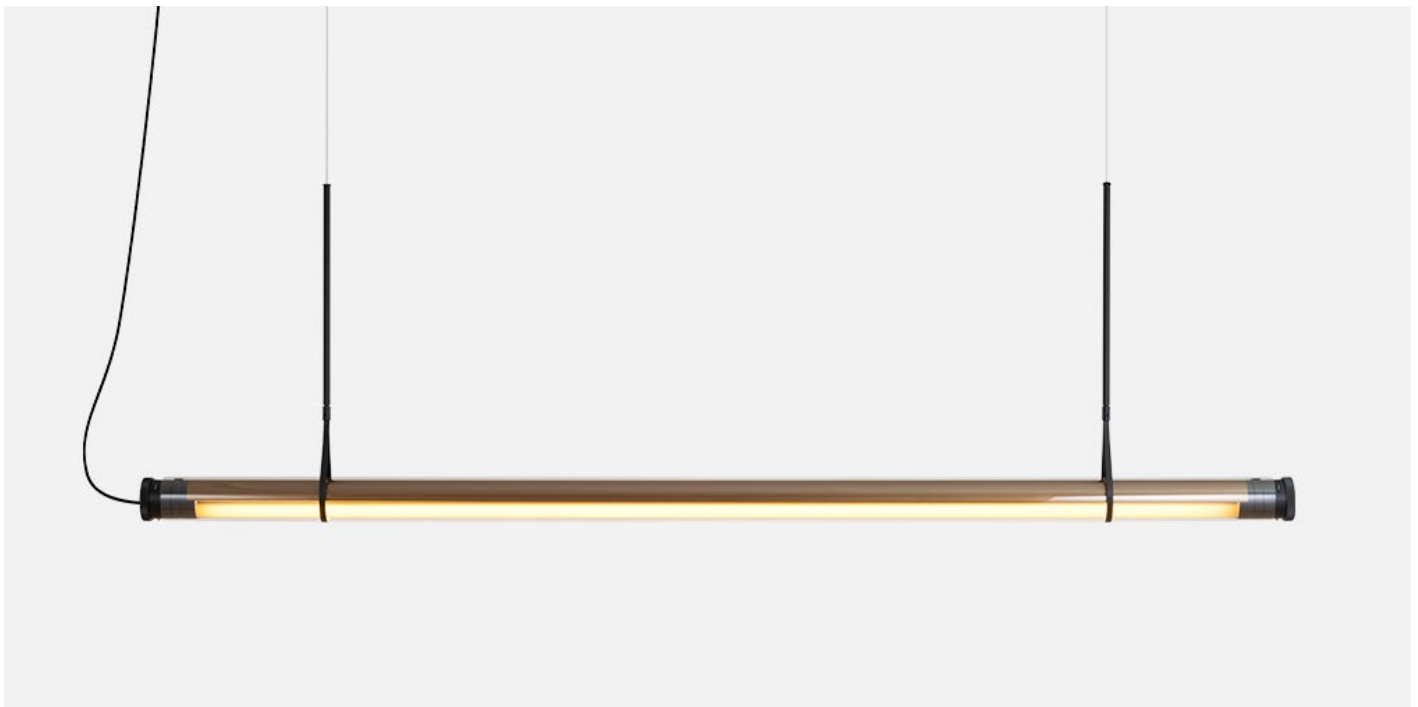

Fris 155

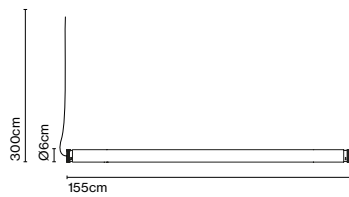

Fris 155

Light source:
 LED SMD 24Vdc 29,4W 2700K CRI90 3570lm
 LED SMD 24Vdc 29,4W 3000K CRI90 3472lm

Fris 215

Light source:
 LED SMD 24Vdc 42W 2700K CRI90 5100lm
 LED SMD 24Vdc 42W 3000K CRI90 4960lm

Cable length: 3 m
 Wire installation: Hardwired
 Color cord: Black
 LED included

Fris 215



Aluminium structure. Glass diffuser tube to direct the light in different directions.

- Black
- Bronze

dimmable*



* Depends on the power supply purchased.




Product notes:
 Remote 24V power supply and hooks to be ordered separately.

- [Download](#) Assembly instructions
- [Download](#) Photometric data
- [Download](#) 2D
- [Download](#) 3D

Through the transparent glass we see the lamp's interior, which consists of two profiles: one includes the light source and the other acts as a parabola, projecting a crisp, intense light.



Fris A 75




Fris A 75

Light source:
LED SMD 24Vdc 13,7W 2700K CRI90 1657lm
LED SMD 24Vdc 13,7W 3000K CRI90 1612lm

Aluminium structure. Glass diffuser tube to direct the light in different directions.

- Black
- Bronze



Fris A 155



Fris A 155

Light source:
LED SMD 24Vdc 29,4W 2700K CRI90 3570lm
LED SMD 24Vdc 29,4W 3000K CRI90 3472lm

Wire installation: Hardwired
LED included



Product notes:
Remote 24V power supply to be ordered separately.

- [Download](#) Assembly instructions
- [Download](#) Photometric data
- [Download](#) 2D
- [Download](#) 3D

Through the transparent glass we see the lamp's interior, which consists of two profiles: one includes the light source and the other acts as a parabola, projecting a crisp, intense light.



Florón Fris

Luminaire: 220 - 240 VAC Casambi 35W (max.)

Class I

Luminaire: 220 - 240 VAC TRIAC 20W (max.)

Class II

● Black

Luminaire: 220-240 VAC DALI / Casambi 35- 60W (max.)

Class I

Luminaire: 220-240 VAC TRIAC 50W (max.)

Class II

● Black

Luminaire: 220 - 240 VAC DALI / Casambi 100W (max.)




Class I

Luminaire: 220 - 240 VAC TRIAC 100W (max.)

Class II

● Black

Product note: Canopies are not compatible with Fris Pro.



Fuente alimentación (RSC)



Power supply 20W - 24V - Clase II - Triac

Power supply 50W - 24V - Clase II - Triac

Power supply 35W - 24V - Clase II - DALI

Power supply 60W - 24V - Clase II - DALI

Accesorio disco




Tapa lateral



dimnable

Hooks and unions


Hook 47 x1



Support 13x2




Doble hook 96 x1




Union 30




Doble hook 71 x1




Union 50



Doble hook 146 x1



Union 100




Aluminium structure

● Black


Product notes: Hooks to make compositions



Examples of compositions Fris

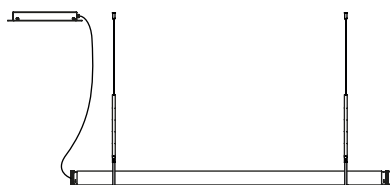


1 unit Fris 155
1 unit Hook 50 x2
1 unit Canopy

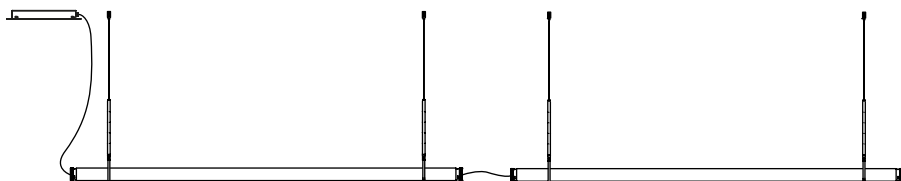


2 units Fris 215
2 units Hook 50 x2
1 unit Canopy
1 unit Side cover


Product notes: Max. 3x Fris 155
Max. 2x Fris 215

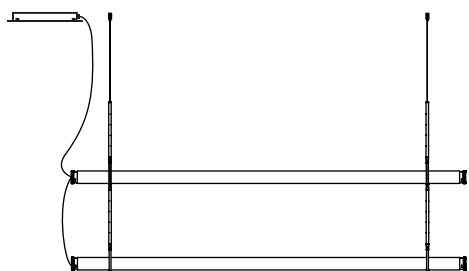


2 units Fris 215
2 units Double hook 96
1 unit Canopy

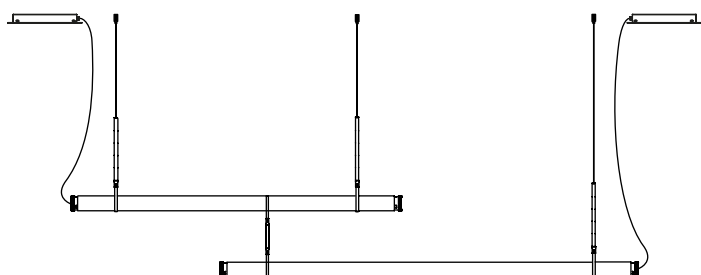


1 unit Fris 155
1 unit Fris 215
1 unit Hook 50 x2
1 unit Hook 50 x1
1 unit Union 30
1 unit Canopy Fris 155
1 unit Canopy Fris 215

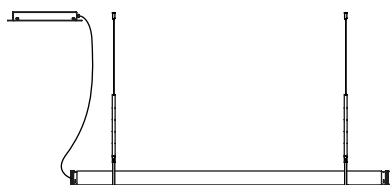


1 unit Fris Pro 155
1 unit Hook 50 x2

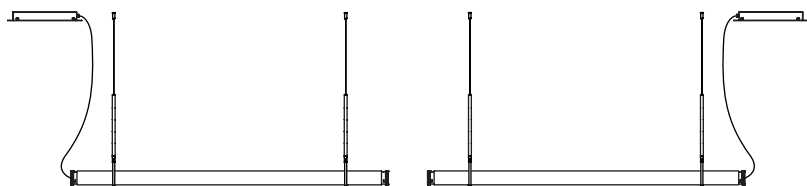

2 units Fris Pro 155
2 units Hook 50 x2

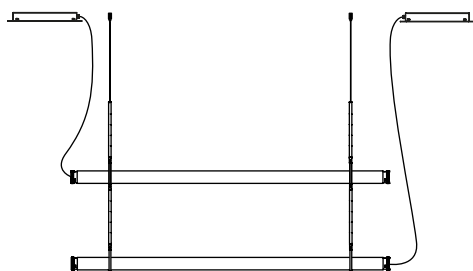

2uds. Fris Pro 155
2ud. Hook doble 96

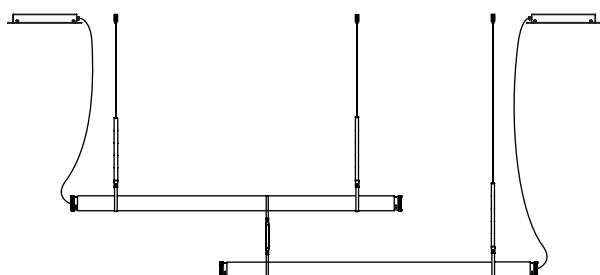

2ud. Fris Pro 155
1ud. Hook 50 x2
1ud. Hook 50 x1
1ud. Union 30