





Elipse

Josep Lluís Xuclà

marset


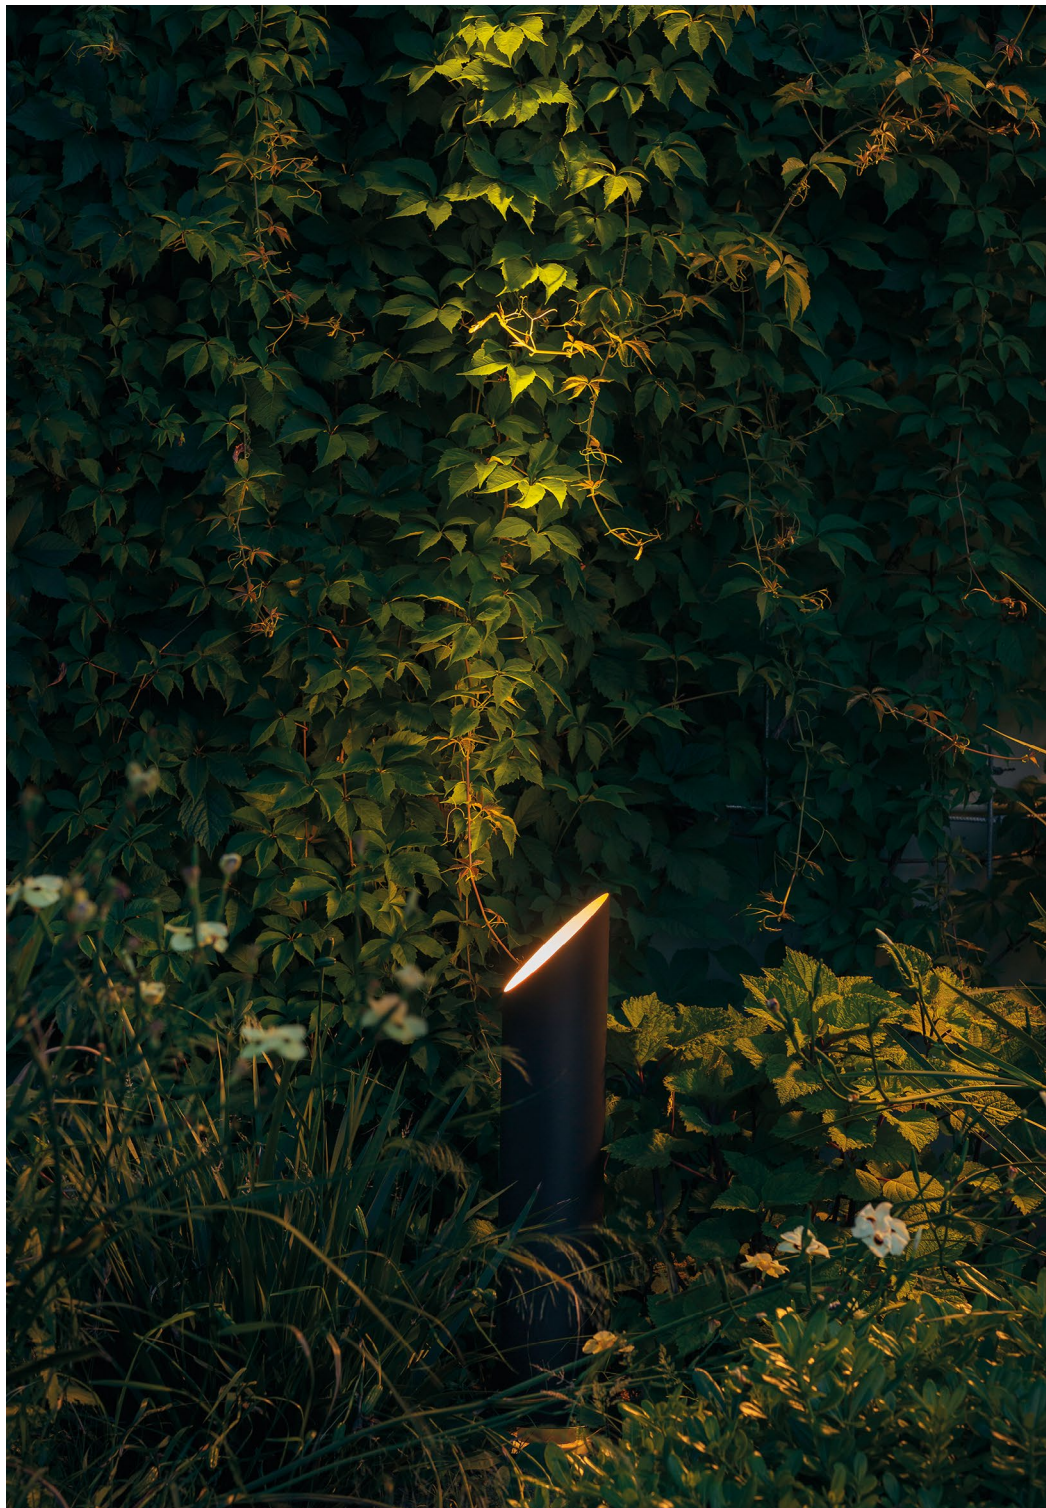


Elipse P 48



* Cable length - 2,5 m.

Elipse P 79



Elipse P48

Light source:
LED COB 230VAC 15W
2700K CRI90 1022lm

Luminaire:
230VAC TRIAC 15W 515lm

Elipse P79

Light source:
LED COB 230VAC 15W
2700K CRI90 1022lm


Luminaire:
230 VAC TRIAC 15W 281lm

LED included

Lacquered aluminium tube, the interior always in white finish.


- Graphite grey (RAL 7024)
- Brown (RAL 8019)

Black electrical cord.



- [Download](#) Assembly instructions
- [Download](#) Energy label
- [Download](#) 2D
- [Download](#) 3D
- [Download](#) Photometric data

Dimmer Casambi IP65




ABS case with powder-coated aluminum trim. Bluetooth smart wireless trailing edge dimmer that adjusts light intensity or switches the lamp ON/OFF. Available in Android or iOS with the app Casambi.

Range



info@marset.com
www.marset.com

In expansive outside settings this lamp enhances the light that it emits as it interplays with whatever it illuminates: a tree, a garden, a wall, or a façade.

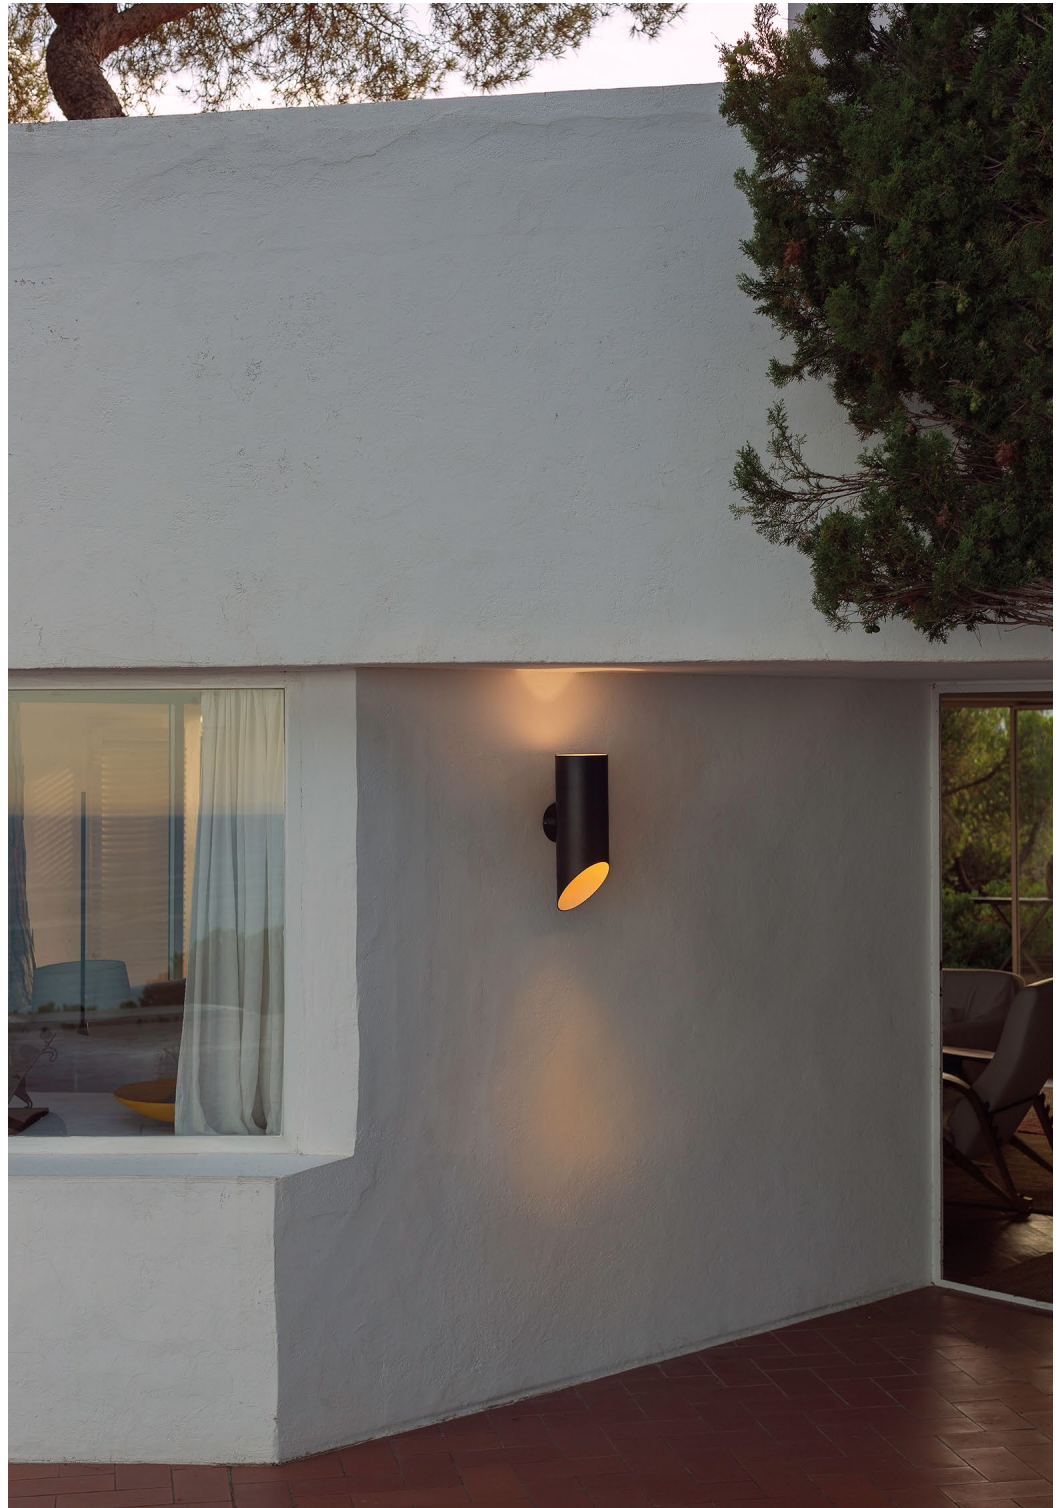


Elipse

Josep Lluís Xuclà

marset



Elipse A



info@marset.com
www.marset.com

Elipse A

Light source:
LED COB 230VAC 10W(x2)
2700K CRI90 1426lm

Luminaire:
230 VAC TRIAC 20,56W
483lm

LED included

Lacquered aluminium tube, the interior
always in white finish.


- Graphite grey (RAL 7024)
- Brown (RAL 8019)

IP65



- [Download](#) Assembly instructions
- [Download](#) Energy label
- [Download](#) 2D
- [Download](#) 3D
- [Download](#) Photometric data

Range



In expansive outside settings this lamp enhances the light that it emits as it interplays with whatever it illuminates: a tree, a garden, a wall, or a façade.