

Calathea Horizontal Gyde Medium

REFERENCE CT3431/14

DESCRIPTION

Rising from the dense and untamable tropical forests, the Calathea unfurls its leaves with a breathtaking grace that reflects life's quiet wonder. Its intricate patterns and gentle response to light—folding and opening in harmony with its surroundings serve as a profound reminder of the importance of staying connected to the world around us. This rhythm of adaptation and serenity teaches us to embrace transformation with elegance, trusting in the natural flow that guides us. The Calathea Collection is a celebration of nature's artistry and a reflection of its quiet wisdom, inviting us to find beauty in life's twists and turns, to move through each moment with poise, and to let the light lead us toward something extraordinary.

Finish shown here Metal FP | Glass 10


Designed and produced by hand in Portugal.

Serip reserves the right to make changes or improvements at any time it deems useful to guarantee the highest quality standards for its products.

Hand-finished, some variations may occur.

All the glass models are designed by Serip and exclusively handmade produced, establishing a unique and prestigious feature of the glass handwork art. For this reason, there is the possibility of variation in measures, weight, colour and shape represented.

TECHNICAL DRAWING

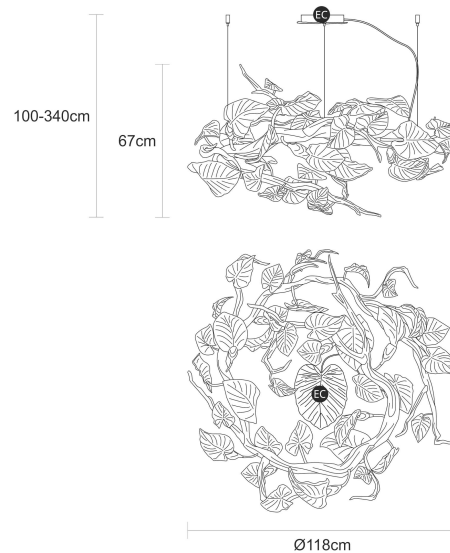

TECHNICAL SPECIFICATIONS

MEASUREMENTS

FIXTURE SIZE & WEIGHT

Diameter 118.00cm / 46.00in

Height 67.00cm / 26.00in

OAH Overall Height Min 100.00cm / 34.00in

OAH Overall Height Max 340.00cm / 134.00in

Weight 43.00kg / 88.00lb

PACKAGE SIZE & WEIGHT

(m)Package 1/2 0.00m x 0.00m x 0.00m
=0.00CBM

ELECTRIC FEATURE

Installation Ceiling

IP degree IP20

220-240V 50Hz-60Hz

Max Power Consumption 23W

Light Sources

14 x LED module

Included Sources

Light Sources

14 x LED module

Lumens 2688lm

Kelvin 3000

CRI 90

Dimming system DALI

Optional Sources

Light Sources

14 x LED module

Lumens 2520lm

Kelvin 2700

CRI 80

Dimming system DALI

110-120V 50Hz-60Hz

Max Power Consumption 23W

Light Sources

14 x LED module

Included Sources

Light Sources

14 x LED module

Lumens 2520lm

Kelvin 3000

CRI 90

Dimming system DALI

Optional Sources

Light Sources

14 x LED module

Lumens 2520lm

Kelvin 2700

CRI 80

Dimming system DALI

ENERGY RATING



SERIP

CERTIFICATIONS



CARE INSTRUCTIONS

Due to the nature of our exquisite hand applied finishes, wipe clean with a soft, dry cloth or static duster must be used to clean the fixture.

Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

Cleaning is limited to the outer surfaces, shades or glass. It is important to ensure that no moisture enters the terminal compartment or reaches any live parts.

As our products are subject to technical modifications, we cannot guarantee, that all information is always up to date. Please contact our [technical department](#) with any queries.

SERIP

OPTIONAL FINISHES

METAL FINISHES



Talha (TA)



Silver/White
Patina
(FP/PB)



Silver (FP)



Rose Gold
(RO)



Palladium
(PL)



Lead (CH)



Gold/White
Patina
(FO/PB)



Gold (FO)



Copper (CO)



Black (PR)

GLASS FINISHES



Clear (10)

SERIP